




**Prises de Pression raccordement JIC** (filetage UNF étanchéité par cône 74°)

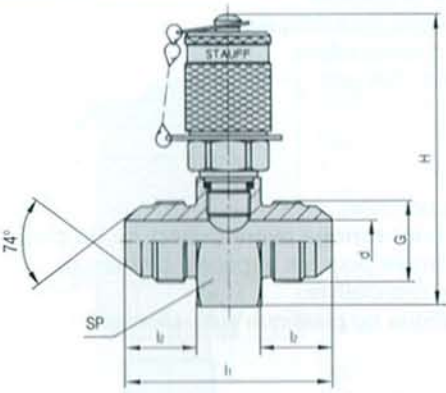


Ø	G UNF	Ø d	l1	l2	SP	H	Références
1/4	7/16-20	4,4	43	14	24	62	SMK 20 - J 1/4 - PG
5/16	1/2-20	6	43	14	24	62	SMK 20 - J 5/16 - PG
3/8	9/16-18	7,5	43	14	24	62	SMK 20 - J 3/8 - PG
1/2	3/4-16	9,9	48,4	16,7	30	68	SMK 20 - J 1/2 - PG
5/8	7/8-14	10,5	53,6	19,3	30	68	SMK 20 - J 5/8 - PG
3/4	1 1/16-12	15	58,8	21,9	36	74	SMK 20 - J 3/4 - PG
1"	1 5/16-12	21	61,2	23,1	41	79	SMK 20 - J 1" - PG
1 1/4"	1 5/8-12	26	65,6	24,3	46	84	SMK 20 - J 1 1/4 - PG
1 1/2"	1 7/8-12	33	72	27,5	55	93	SMK 20 - J 1 1/2 - PG

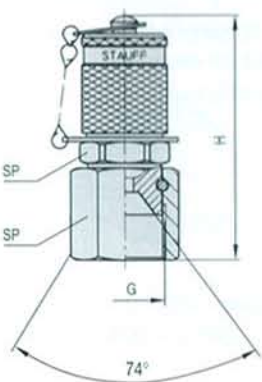

Ø		G UNF	H		SP	Fig.	Références	
mm	inch		mm	inch			Joint Perbunan N	Joint Viton
6	1/4	7/16-20	60	2.360	14	1	SMK 20 - J 1/4 - PK	SMK 20 - J 1/4 - VK
8	5/16	1/2-20	63	2.480	17	1	SMK 20 - J 5/16 - PK	SMK 20 - J 5/16 - VK
10	3/8	9/16-18	64	2.520	19	1	SMK 20 - J 3/8 - PK	SMK 20 - J 3/8 - VK
12	1/2	3/4-16	68	2.680	22	1	SMK 20 - J 1/2 - PK	SMK 20 - J 1/2 - VK
16	5/8	7/8-14	71	2.795	27	1	SMK 20 - J 5/8 - PK	SMK 20 - J 5/8 - VK
20	3/4	1 1/16-12	70	2.755	32	2	SMK 20 - J 3/4 - PK	SMK 20 - J 3/4 - VK
25	1"	1 5/16-12	69	2.720	38	2	SMK 20 - J 1" - PK	SMK 20 - J 1" - VK
32	1 1/4"	1 5/8-12	72	2.835	50	2	SMK 20 - J 1 1/4 - PK	SMK 20 - J 1 1/4 - VK
38	1 1/2"	1 7/8-12	75	2.950	57	2	SMK 20 - J 1 1/2 - PK	SMK 20 - J 1 1/2 - VK

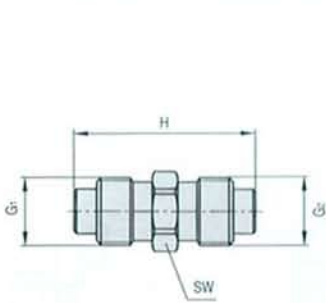**Adaptateur de raccordement SSV (mâle fixe / mâle fixe)**


G <sub>1</sub>	G <sub>2</sub>	H	SW	Référence
M 16 x 2	M 16 x 2	42,4	17	SSV 20

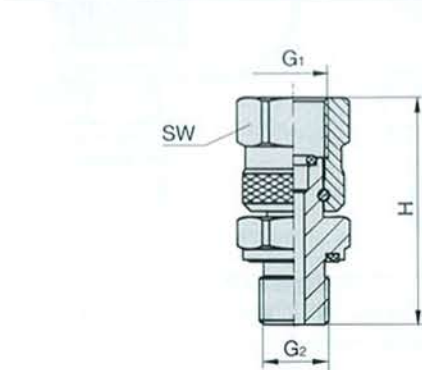**Adaptateur orientable pour manomètre EMV**


G <sub>1</sub>	G <sub>2</sub>	H	SW	Références	
				Joint Perbunan	Joint Viton
G 1/4	G 1/4	42	19	EMV-G 1/4-P-OR-PC	EMV-G 1/4-V-OR-VC
G 1/4	G 1/2	47	19	EMV-G 1/4/G 1/2-P-OR-PC	EMV-G 1/4/G 1/2-V-OR-VC
G 1/2	G 1/4	51	27	EMV-G 1/2/G 1/4-P-OR-PC	EMV-G 1/2/G 1/4-V-OR-VC
G 1/2	G 1/2	55,5	27	EMV-G 1/2-P-OR-PC	EMV-G 1/2-V-OR-VC